


**PERMANENT MOUNT MODELS**  
**Wireless Hand-Held & Wireless Dash-Mount Remotes**  
 3367 (white) 3349 (black)

**Hard Wired Dash-Mount Remote**  
 3320 (white) 3321 (black)

**PORTABLE MODELS**  
**Wireless Hand-Held & Wireless Dash-Mount Remotes**  
 33672 (white) 33492 (black)

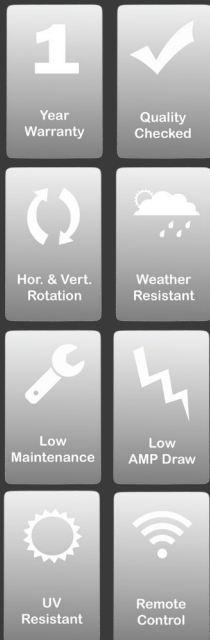

<b>Housing:</b>	ASA Luran heat resistant, High impact, UV resistant material
<b>Fasteners:</b>	Stainless Steel
<b>Motors:</b>	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.133 mN.m/amp, Stall: 12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
<b>Max Current Draw:</b>	4.5 amps
<b>Power Requirements:</b>	12V DC nominal (range 6V DC to 16V DC)
<b>Power Consumptions:</b>	2 watts nominal, 8 watts with heater on
<b>Thermal Imaging Performance</b>	
<b>Sensor Type:</b>	Uncooled micro bolometer
<b>Field of View:</b>	24° h x 18° v
<b>Spectral Band:</b>	7.5-13.5 Microns with Pixel Size of 25 Microns
<b>Resolution:</b>	324 x 256 pixels
<b>Time to Image:</b>	< 2 seconds
<b>Focal Length:</b>	19 millimeters
<b>Outputs / Video:</b>	NTSC or PAL
<b>Connector types:</b>	Power (+/-) Video BNC/RCA
<b>Frame Rate:</b>	30-Hz Standard for NTSC Video, 25 Hz Optional for PAL video, 8.3Hz Export Compliant
	Note: Hz is equivalent to frames per second
<b>Operating Temperature:</b>	-40c to 80c
<b>Weather Resistance:</b>	Hermetically sealed, pressurized enclosure
<b>Impact Protection:</b>	High impact resistant window with heating element
<b>Wireless Remote Controls:</b>	Radio Frequency: 433 MHz
	2187 programmable channels
	Radio Frequency allows for remote operation up to 80 feet away
	Transmitter power: 2 Duracell MN21 12v batteries
<b>Warranty:</b>	1 Year Limited Warranty
<b>Mounting Options:</b>	Permanent Mount or Portable Magnetic Base