

## PERMANENT MOUNT MODELS

### Wireless Hand-Held Remote

3000 (white) 3006 (chrome) 3051 (black)

### Wireless Dash-Mount Remote

3100 (white) 3106 (chrome) 3151 (black)



### Wireless Hand-Held &

### Wireless Dash-Mount Remotes

3067 (white) 3066 (chrome) 3049 (black)

### Hard Wired Dash-Mount Remote

3020 (white) 3026 (chrome) 3021 (black)



## PORTABLE MODELS


### Magnetic Base

### Wireless Hand-Held Remote

30002 (white) 30062 (chrome) 30512 (black)



### Stryker Halogen Light Beam Dimensions

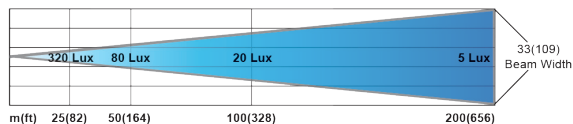

Illuminance (Lux) 320 80 20 5

Peak Beam Intensity: 200,000 Candela

Maximum Beam Distance: 894 m / 2,933 ft

Beam Angle: 10°



<b>Housing:</b>	ASA Luranheat resistant
	High Impact, UV resistant material
<b>Gears &amp; Transmission Parts:</b>	Lexan and Brass
<b>Fasteners:</b>	Stainless Steel
<b>Motors:</b>	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.133 mN.m/amp, Stall: 12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
<b>Lamp / Cr5 II Pentabeam :</b>	Phillips 9011 Bulb
<b>Peak Beam Intensity:</b>	200,000 Candela
<b>Max Beam Distance:</b>	2,933 ft.
<b>Reflector:</b>	Computer generated parabolic
<b>Voltage DC:</b>	12V
<b>Power Consumption:</b>	65W
<b>Max current draw:</b>	5.5 amps
<b>Wireless Remote Controls:</b>	Radio Frequency: 433 MHz
	2187 programmable channels
	Transmitter power: 2 Duracell MN21 12v batteries
<b>Warranty:</b>	5 Year Limited Warranty
<b>Mounting Options:</b>	Permanent Mount or Portable Magnetic Base
<b>Rockguard:</b>	Included with all Halogen Styker Models