

PERMANENT MOUNT MODELS

Wireless Hand-Held Remote

- 30004 (white)
- 30064 (chrome)
- 30514 (black)

Hard Wired Dash Mount Remote

- 30204 (white)
- 30264 (chrome)
- 30214 (black)

PORTABLE MODELS


Magnetic Base

Wireless Hand-Held Remote

- 30005 (white)
- 30065 (chrome)
- 30515 (black)



Stryker LED
Light Beam Dimensions

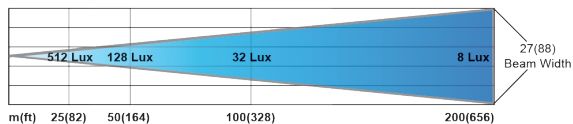


Illuminance (Lux) 512 128 32 8

Peak Beam Intensity: 320,000 Candela

Maximum Beam Distance: 1,131 m / 3,711 ft

Beam Angle: 8°

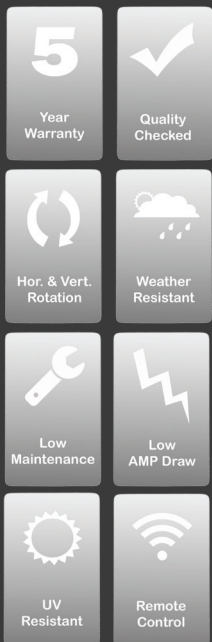

Housing:	ASA Luran heat resistant High impact, UV resistant material
Gears & Transmission Parts:	Lexan and Brass
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V D.C. High Torque, R.P.M. 6087 Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps Output: 1.96 watts w/built in stall protection circuitry Built in stall protection circuitry
Type and Quality of LED's:	10 High Flux LED's P-Vex lens technology 8° beam angle Anodized Aluminum heat sink w/liquid powder-cast finish
Peak Beam Intensity:	320,000 Candela
Max Beam Distance:	3,711 ft.
Voltage DC:	12V
Power Consumption:	40W
Max Current draw:	3.5 amps
Wireless Remote Controls:	Radio Frequency: 433 MHz 2187 programmable channels Transmitter power: 2 Duracell MN21 12v batteries
Warranty:	5 Year Limited Warranty
Mounting Options:	Permanent Mount or Portable Magnetic Base
Rockguard:	Not available for LED Styker Models