


GT SERIES - HALOGEN

37146 Old Hwy 17 - Culbertson, NE 69024 | 800.557.0098 | golight.com



PERMANENT MOUNT

Wireless Hand-Held Remote
2000GT (white) 2051GT (black)

Wired Dash-Mount Remote
2020GT (white) 2021GT (black)


Wireless Hand-Held &
Wireless Dash-Mount Remotes
2007GT (white) 2057GT (black)

PORTABLE MODELS


Permanent Shoe
Wireless Remote - 7900GT (white)

PORTABLE MODELS

Magnetic Shoe
Wireless Hand-Held Remote
7901GT (white) 7951GT (black)

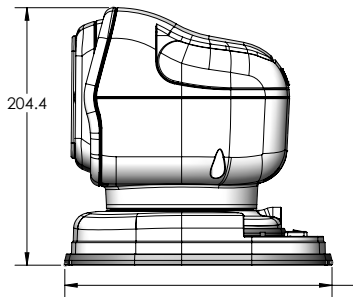

Golight RadioRay Halogen
Light Beam Dimensions




Illuminance (Lux) 360 90 25 6

Peak Beam Intensity: 225,000 Candela

Maximum Beam Distance: 949 m / 3,113 ft

Beam Angle: 8°

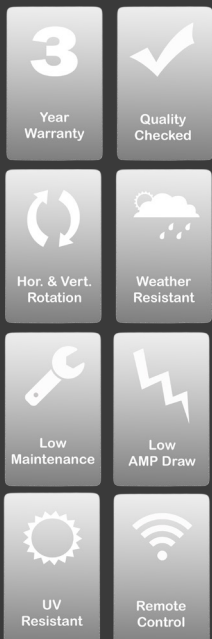

Housing:	Heat resistant, high impact injection molded housing
	ASA Polymer (white housing) ABS Polymer (black housing)
Transmission Parts:	Stainless Steel pinion drive
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V DC Stall Torque 15.6 kg-cm
	No-load Speed 55.8 rpm
	Rated Output Power 1.42 W
	Stall Protected
Lamp / Cr5 Pentabeam :	Phillips H9 Bulb (est. 270 life hours)
Peak Beam Intensity:	225,000 Candela
Max Beam Distance:	3,113 ft
Reflector:	Computer generated parabolic
Voltage DC:	12V
Power Consumption:	65W
Max Current Draw:	5.5 amps
Wireless Remote Control:	Radio Frequency: 433 MHz
	> 2000 possible address codes with 7 station dip switch
	Transmitter power: 2 Duracell MN21 12v batteries
Hardwired Dash Mount Remote:	On/Off switch, 4 way toggle
	20' of six wire cord included; 10' increments as accessories
Warranty:	3 Year Limited Warranty
Mounting Options:	Permanent Mount, Portable Light/Magnetic Shoe, Portable Light/Permanent Shoe
Rockguard:	Included with all Halogen Golight/Radioray models