

GXL - Performance

37146 Old Hwy 17 - Culbertson, NE 69040 | 800.557.0098 | golight.com




GXL™ LED Spotlight
Fixed Mount
4411 (black)


GXL™ LED Floodlight
Fixed Mount
4421 (black)
4422 (white)



GXL™ LED Light Beam Dimensions

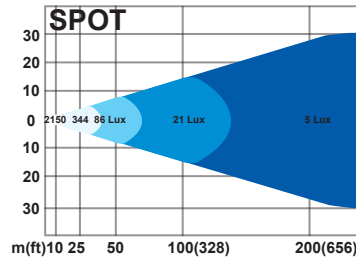

Peak Beam Intensity: 215,000 Candela
Maximum Beam Distance: 927m
Beam Angle: 15° Spot

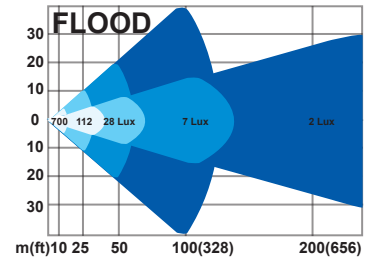

Lumens: 7,500
Beam Angle: 40° Flood

| | |
|----------------------------|-----------------------|
| 10 Year Warranty | Quality Checked |
| UV Resistant | Weather Resistant |
| Low Maintenance | Low AMP Draw |

| | |
|-----------------------------------|---|
| Housing: | A360 die cast aluminum with paint finish |
| Parts: | EMI Filtering & Shield |
| Fasteners: | 316 Stainless Steel hardware |
| Lens: | High Impact Lexan |
| IP Rating: | IP67 |
| Input Voltage Range: | 9-32V DC |
| Operating Temperature: | |
| Light Dimensions: | 6.1" x 4.8" x 3.3" |
| FLOOD MODELS | |
| Quality and Type of LED's: | 18 high output LED's, 40° Beam Angle |
| LED Life Expectancy: | 50,000 hours |
| Color Temperature | 6,000k |
| Lumens: | 7,500 raw lumens |
| Nominal Current at: | 4.6 amps at 13.8V DC, 70 watts |
| SPOT MODELS | |
| Quality and Type of LED's: | 12 high output LED's, 15° Beam Angle |
| LED Life Expectancy: | 50,000 hours |
| Color Temperature | 6,000k |
| Nominal Current at: | 4.2 amps at 13.8V DC, 83 watts |
| Peak Beam Intensity: | 215,000 Candela |
| Max Beam Distance: | 927m |
| Warranty: | 10 Year Limited Warranty |
| Rockguard | Sold Separately #15344 (white) #15345 (black) |