


Stryker ST Series - LED HYBRID

37146 Old Hwy 17 - Culbertson, NE 69024 | 800.557.0098 | golight.com



PERMANENT MOUNT MODELS

Wireless Handheld Remote

30008ST (white)

30518ST (black)

Hardwired Dash Control

30208ST (white)

30218ST (black)

PORTABLE MODELS


Wireless Handheld Remote

30009ST (white)

30510ST (black)



LED HYBRID Light Beam Dimensions






Illuminance (Lux) 480 120 30 7.5

Peak Beam Intensity: 300,000 Candela

Maximum Beam Distance: 1,095 m / 3,583 ft

Beam Angle: 15°

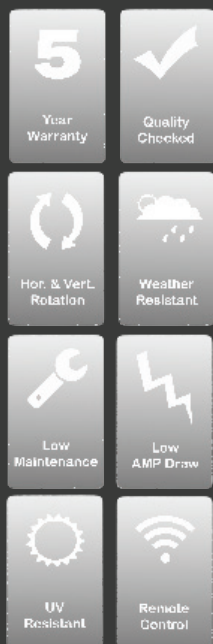

Housing:	ASA Luran heat resistant
	High impact, UV resistant material
Gears & Transmission Parts:	Lexan and Brass
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
Type and Quality of LED's:	10 High Flux LED's
	P-Vex lens technology
	15° beam angle
	Anodized Aluminum heat sink w/liquid powder-cast finish
Peak Beam Intensity:	300,000 Candela
Max Beam Distance:	3,583 ft.
Voltage DC:	12V
Power Consumption:	40W
Max Current draw:	3.7 amps
Wireless Controls:	Radio Frequency: 2.4 GHz, Code Sequencing, Batteries: AAA (Quantity 2)
	Lamp On/Off, Directional Controls, Home Command, Spotlight Selector (1,2), Speed Selector
Hardwired Control:	Lamp On/Off, Directional Controls, Home Command, Spotlight Selector (1,2), Speed Selector
Warranty:	5 Year Limited Warranty
Mounting Options:	Permanent Mount
	or Portable Magnetic Base